


# Specification

**UNI-PEX**

## 10W MARINE SPEAKER WITH TRANSFORMER

### MA-15T

RATED INPUT	10W
RATED IMPEDANCE	1k $\Omega$ (10W), 2k $\Omega$ (5W) (High Impedance 100V Line, Initial setting is "1k $\Omega$ " at our factory)
SOUND PRESSURE LEVEL	100dB (at 1m, 1W input)
FREQUENCY RESPONSE	500Hz~5kHz (Deviation 20dB)
FINISH	Horn Mouth(Aluminum): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.) Reflector (Aluminum): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.) Cover (Die-cast): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.) Bracket (Stainless): Light green (Corrosion-proof coating), (Munsell 2.5G7/2 approx.)
FITTINGS	U-shape Bracket, S type
DIMENSIONS	$\phi$ 145(Daim.) $\times$ 135(L)mm
MASS	Approx. 1.6kg

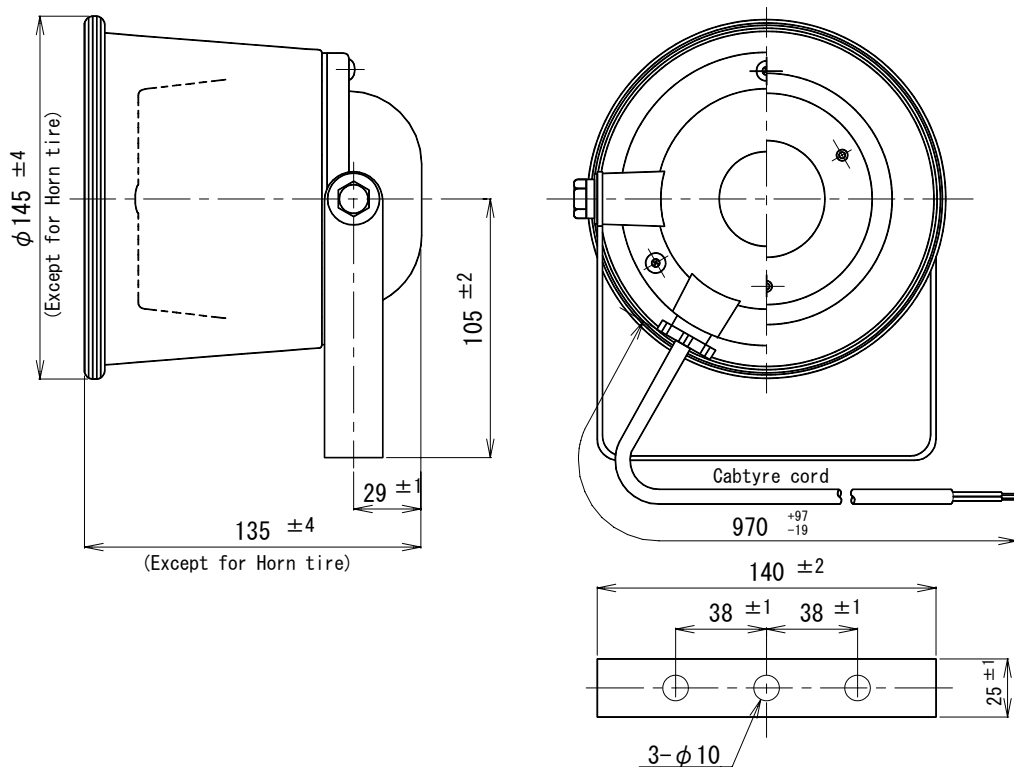

UNIT: mm

**BUSINESS**

JH09

Subject to change for improvement without notice.

製造元 日本電音株式会社 販売元 ユニペックス株式会社